


PS-3A-X Series

TECHNICAL DATA SHEET

FIBRE OPTIC SPLICE PROTECTOR SLEEVE SPECIALISTS

FinishAdapt PS-3A-X Series are premium quality, long-term reliability Bellcore Certified Fibre Optic Fusion Splice Protector Sleeves. Designed to restore the mechanical strength, environmental protection and optical performance of single optical fibre after fusion splicing

Single 250 - 900µm fiber. 2.4mm diameter

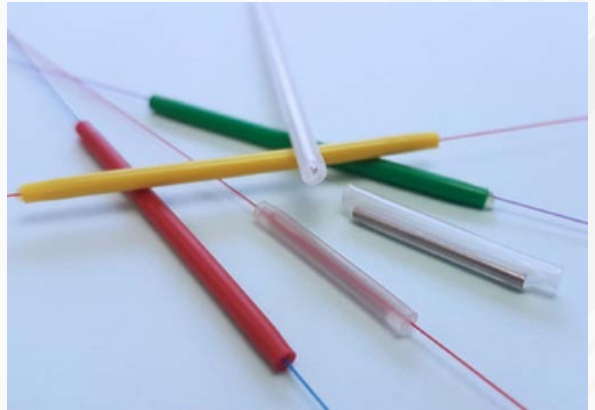

KEY FEATURES

- Tested and Approved high quality and reliability with Industry Standard BELLCORE (Telcordia) GR-1380-CORE CERTIFICATION
- Specialist Manufacturer with 25 years proven reliability
- Pre-Shrunk heat bonded design for faster installation
- Single fibre aperture for easier fiber insertion
- Encapsulated and centred reinforcing pin
- UL Approved high quality materials
- Compatible with most fibers, splice trays and ovens
- Over 2.5 Million 3A series held in stock

Clear as standard and a range of 10 Colours

CERTIFICATIONS / REGULATORY STANDARDS

Telcordia / Bellcore
GR-1380-CORE

UL224 Approved

RoHS Compliant

REACH Compliant

CENELEC Compliant

Conflict-Free Minerals

CERTIFIED

Bellcore Test Conformance Report TCR-8

(Replaces Telcordia TA-NWT-001380)

YDPU2.E467437 2011/65/EU

EC 1907/2006


European Standard EN50411-3-3 Dodd

Frank Act Section 1502 Compliant




PRODUCT DIMENSIONS

Sleeve Diameter	2.4 mm
After Shrinkage	(0.094 inch)
Supplied Internal Diameter	1.4 mm
	(0.055 inch)
Fiber size	250 / 900
	um

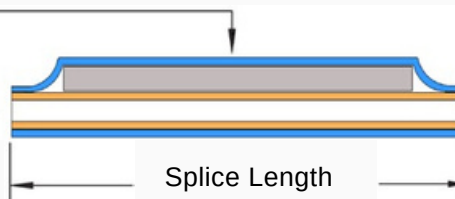

- Heat Shrink Outer Tube
- Adhesive Inner Tube
- Stainless Steel Pin



Part Number	Sleeve Length		Inner Length		Pin Diameter		Pin Length	
	mm	inches	mm	inches	mm	inches	mm	inches
PS-3A-X22	22.0	0.866	22.0	0.866	1.0	0.039	18.0	0.709
PS-3A-X23	23.0	0.906	23.0	0.906	1.0	0.039	18.0	0.709
PS-3A-X25	25.0	0.984	25.0	0.984	1.0	0.039	21.0	0.827
PS-3A-X30	30.0	1.181	30.0	1.181	1.0	0.039	27.0	1.063
PS-3A-X35	35.0	1.378	35.0	1.378	1.0	0.039	31.0	1.220
PS-3A-X40	40.0	1.575	40.0	1.575	1.0	0.039	36.0	1.417
PS-3A-X45	45.0	1.772	45.0	1.772	1.0	0.039	41.0	1.614
PS-3A-X50	50.0	1.969	50.0	1.969	1.0	0.039	46.0	1.811
PS-3A-X	60.0	2.362	60.0	2.362	1.0	0.039	57.0	2.244

FIBRE OPTIC SPLICE PROTECTOR SLEEVE SPECIALISTS

MATERIAL SPECIFICATION

Application Type:	Single Fiber 250µm and 900µm Most splice trays, ovens and coated
Compatibility:	fibers
Outer Material:	Cross-linked Polyolefin Heat Shrinkable Tubing +135°C MIL Spec. UL224 Approved YDPU2.E467437 & SAE-AMS-DTL-23053/5 Class 2
Inner Material:	Hot-melt adhesive Copolymer Stainless Steel 302 BS 2056 with polished
Reinforcing Pin:	and rounded edges
Colours:	Clear as standard and 10 Colours in 25, 35, 45, 61mm long: Black, brown, red, orange, yellow, blue, green, white, violet, grey
Splice Operating Temperature:	-40°C to +70°C (Heat shrink outer rated at -55°C to +135°C)*
Storage Temperature:	-40°C to +70°C
Package Quantity:	Bags of 50 or 100. Labelled over bag of 1,000



RECOMMENDED INSTALLATION

The product is designed so that the meltable inner melts and flows around the fibre joint followed by the outer material shrinking around the assembly. A splice oven setting of 220-235°C for a time of 25-35 seconds is recommended to ensure the correct adhesive material flow and outer shrinkage. A minimum 30 seconds cooling time should be allowed to ensure the meltable adhesive is set before handling and inserting into the splice tray.

Caution: Selecting a higher temperature or shorter cycle time may result in insufficient adhesive flow around the fiber required to form a good reliable splice. Oven settings are based on using Fujikura 62S and 12S fusion splicers and the 60mm long PS-3A-X. Heater temperatures and cycle times must be adjusted to take account of splice protector type and length, splicer oven used and the battery condition, ambient temperature and the operating environment.

COMPANY BACKGROUND & EXPERIENCE

- FinishAdapt are specialists in the design, manufacture and worldwide distribution of Fusion Splice Protector Sleeves. Recognised as the industry leader with 25 years of proven quality and long-term reliability required for this specialist application. Largest range of splice sleeves available, including 1A, 2A, 3A, 3A US, 5A, 6A, dielectric, pin less, ribbon and custom manufactured.
- As industry leaders we have worked with Bellcore (Telcordia) and British Telecom in defining the generic requirements for fusion splice protector technology. We are also joint authors of the CENELEC European Standard for splice protector product design.
- FinishAdapt became the first and currently only company to hold Bellcore (Telcordia) GR-1380-CORE Certification.
(Caution: most other manufacturers are not certified and can only claim compliance to this industry standard).
- Widely used for single mode fiber in optical communications network infrastructure, telecommunications broadband networks, outside plant cabling, data centers, utility networks, FTTH, FTTP, FTTC fibre optic installations, CATV networks, lasers, sensors, opto-electronics and photonics applications.

PRODUCT DESIGN & ADVANTAGES

- Our splice sleeves are manufactured with a Pre-Shrunk heat-bonded assembly along the complete sleeve, encapsulating the reinforcing pin and providing a single fibre aperture. The benefit of this design eliminates fiber misalignment whilst maintaining longitudinal component alignment. The easier fibre insertion and Pre-Shrunk design results in faster installation times.
- Manufactured from high quality UL Approved Irradiation Cross-linked Polyolefin heat shrinkable outer, a unique hot-melt adhesive copolymer inner and a centred and encapsulated stainless steel reinforcing pin with deburred and polished edges that protects the fiber from damage.
- The product is designed so that the adhesive melts and flows around the fiber joint first to provide vibration damping and environmental sealing from dust and moisture. The heat shrinkable outer then drives out any air and provides fiber retention and strain relief. The reinforcing pin provides alignment and mechanical strength. Splice protection sleeves are used as an alternative to fiber recoating.

CUSTOM & STOCK PRODUCT

A comprehensive range of Single and Mass Ribbon sleeves are available from stock. Full details are on our website. We also design and manufacture splice protector sleeves to customer's requirements and own brand label for leading manufacturer's and distributor's. Please contact us now for further details.