


Field-Configurable Patch Panels

KEY FEATURES

- Meets EIA/ECA-310-E 19 in mounting standards
- Compatible with Signamax Keystone Modules to accommodate a multitude of applications
- Angled design eliminates the need for cable management panels saving space
- Wall-Mount are available with an 89D bracket for easier access to termination

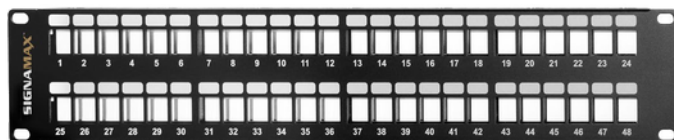

Straight Panels

PART NUMBER	DESCRIPTION
24U-HDMMP	24-Port Field-Configurable Patch Panel, 1U
48U-HDMMP	48-Port Field-Configurable Patch Panel, 2U
48U-HDMMP-1R	48-Port Field-Configurable Patch Panel, 1U

Angled Panels

PART NUMBER	DESCRIPTION
24U-HDMMP-A	24-Port Angled Field-Configurable Patch Panel, 1U
48U-HDMMP-A	48-Port Angled Field-Configurable Patch Panel, 2U
72U-HDMMP-A	72-Port Angled Field-Configurable Patch Panel, 2U

Wall-Mount Panels

PART NUMBER	DESCRIPTION
12U-M89	12-Port Wall-Mount Mini Patch Panel w/89D Bracket



SPECIFICATIONS

DIMENSIONS

24U-HDMMP:	1U - 1.75" H x 1.5" D x 19.0" H (44mm x 38mm x 482mm)
48U-HDMMP:	2U - 3.5" H x 1.5" D x 19.0" H (88mm x 38mm x 482mm)
48U-HDMMP-1R:	1U - 1.75" H x 1.5" D x 19.0" H (44mm x 38mm x 482mm)
24U-HDMMP-A:	1U - 1.75" H x 4" D x 19.0" H (44mm x 102mm x 482mm)
48U-HDMMP-A:	2U - 3.5" H x 4" D x 19.0" H (88mm x 102mm x 482mm)
72U-HDMMP-A:	2U - 3.5" H x 4" D x 19.0" H (88mm x 102mm x 482mm)
12U-M89:	2.38" D x 2.06" W x 10.0" H (60.5 mm x 52.3 mm x 254 mm)
Jack Opening:	1.21/1.67" D x 0.58" W x 1.02" H (30.8/42.4 x 14.6 x 25.8 mm)

CONSTRUCTION

Panel: Steel with corrosive resistant Black finish; rear nickel plated
89D Bracket: Thermoplastic

ENVIRONMENTAL CONDITIONS

Operating & Storage Temperature: -40 to 185°F (-40 to 85°C)
Operating RH: 93% (non-condensing)

COMPLIANCE

CEA310E

WARRANTY 5 - Year Limited Component