

19" DYNAframe

High Density Open Frame System Racks
Double Frames d:80 mm Frame Unit



Width: 530 mm
Depth: 670 mm

Load Capacity: 600 kg.

U Height: 27U, 36U, 42U, 45U, 48U

Standards and Compliances:



ISO 9001
Quality Management System
EN 61587-1
Mechanical Structures for
Electronic Equipment
EN IEC 60297, 19" Mounting
EN IEC 60917 Overall Cabinet
Dimensions
EIA/ ECA-310 (D/E) 19" 482,6 mm
and U 44,45 mm Height Sizing



CE conform to
EN 60950-1
Information Technology
Equipment, Safety,
Part-1: General Requirement
EN IEC 62368-1 Audio/Video, Information
and Communication Technology
Equipment
Part 1: Safety requirements



UL listed to
UL 2416, Outline of Investigation for
Audio/Video, Information and
Communication Technology Equipment
Cabinet, Enclosure and Rack
Systems; UL 60950-1 and CSA C22.2
NO. 60950-1-07, Information Technology
Equipment Safety
Part 1: General Requirements
Environment Friendly;



ISO 14001 Environmental
Management System
RoHS compliancy
100% Recyclable Material


Standard Color:



RAL 7035 Light Grey



RAL 9005 Black

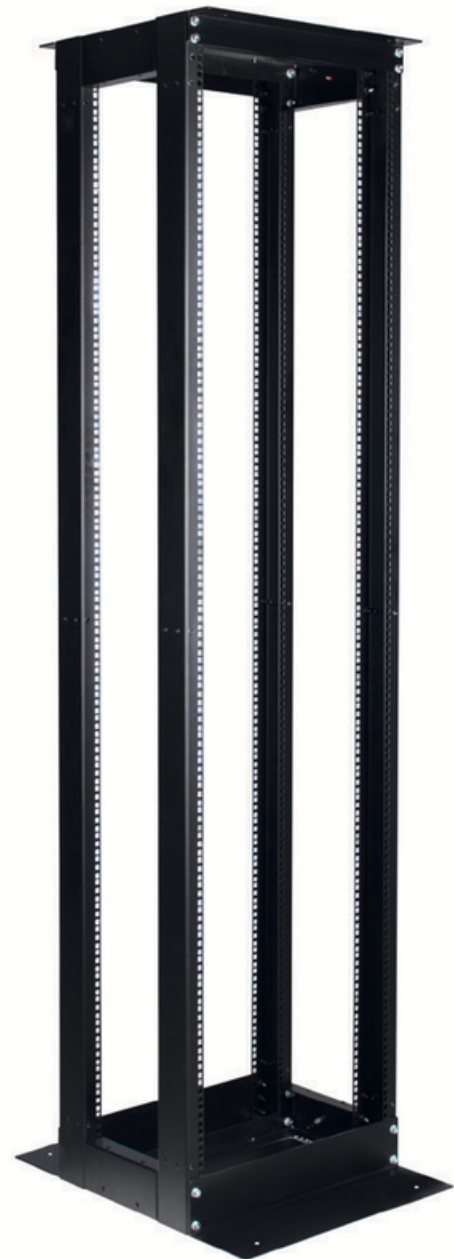

DYNAframe Series Open Frame System Racks Networking Frames are with 19" w:530 mm and d:670 mm base L parts size, physical sizes, 5 different heights, gives a wide selection for users. The connection part between frames are changeable for maintaining the D:670 mm depths which are variants of having the same accessories of the standard cabinets depth of frame is 80 mm, where base L parts overall depth is D:670 mm.


Top and bottom frame cases has 19" provision of 3U for 670 mm depth configurations where suitable purpose 19" cable management accessories can be positioned for cable management.

19'' DYNAframe

High Density Open Frame System Racks
Double Frames d:80 mm Frame Unit

Construction Drawings

Width: 530 mm
Depth: 670 mm

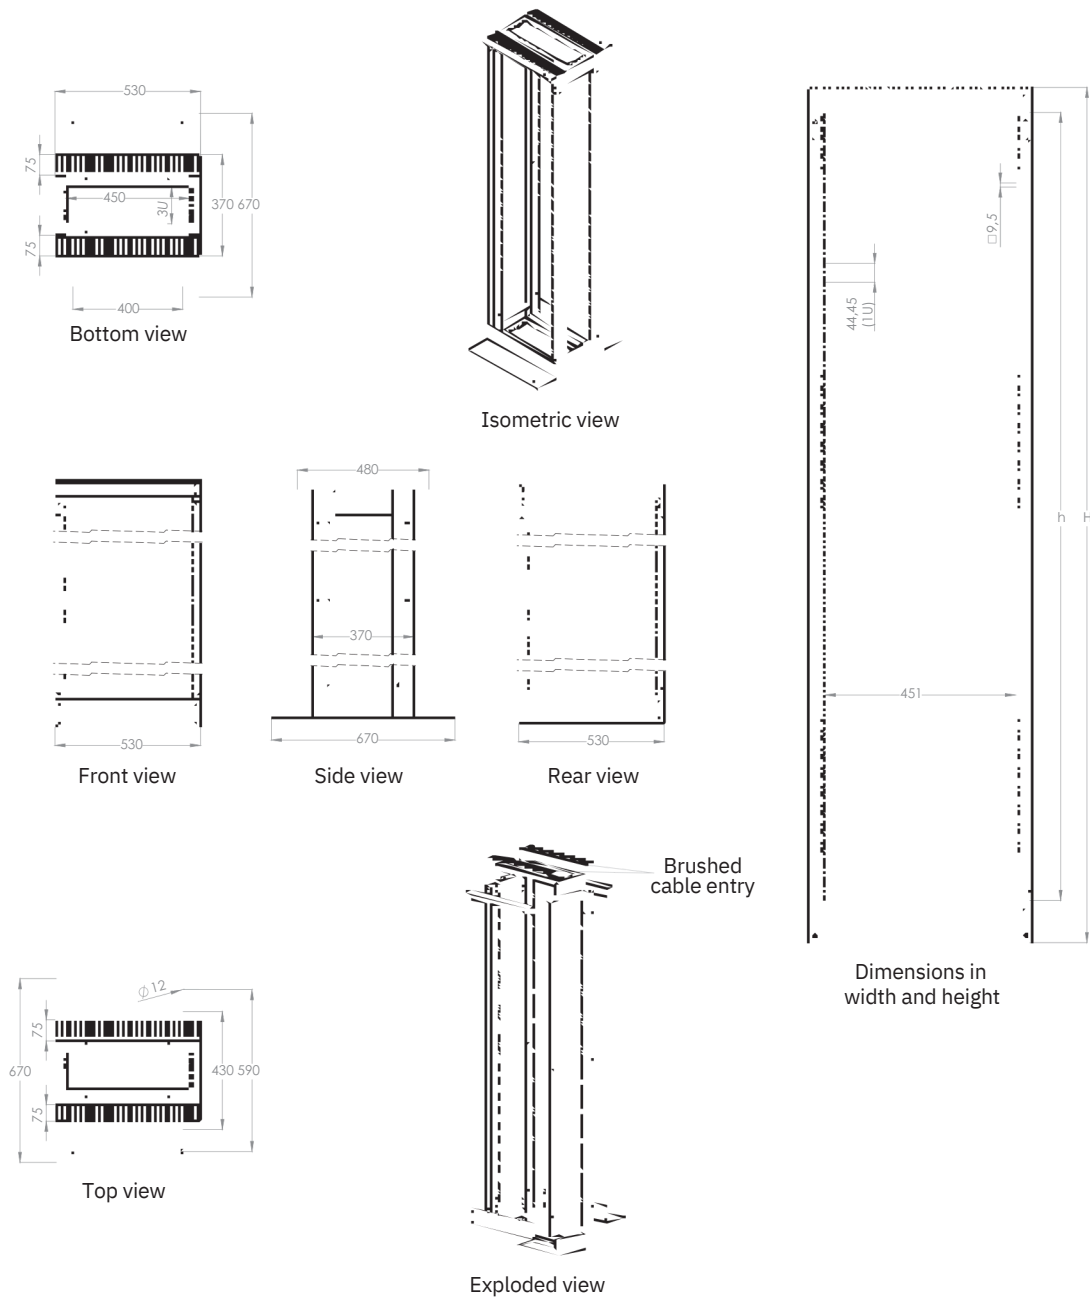

19'' DYNAframe Open Frame System Racks Double Frames d=80 mm Frame Unit W=530 mm D=670 mm

Product Number*	Product Description	Size WxDxH mm	h Size in U	h in mm	H mm, overall without feet and/or castor	Width Overall mm	Width Rail to Rail	Depth Overall mm	Depth of Rail	PACKING DIMENSIONS WxDxH mm	QTY IN PALLET	Standard NET Weight of Product lgs	Gross Weight of Product lgs
LN-OF27UDD670-CC27U D=80 mm	Frame Double Frame Open System Rack D=670 mm LN-	530x670x1356	27U	1200	1356	530	19"	670	370	165x150x1375	1	32,3	33,3
OF36UDD670-CC36U D=80 mm	Frame Double Frame Open System Rack D=670 mm LN-	530x670x1756	36U	1600	1756	530	19"	670	370	165x150x1775	1	36,6	37,8
OF42UDD670-CC42U D=80 mm	Frame Double Frame Open System Rack D=670 mm LN-	530x670x2022	42U	1867	2022	530	19"	670	370	165x150x2040	1	39,1	41
OF45UDD670-CC45U D=80 mm	Frame Double Frame Open System Rack D=670 mm LN-	530x670x2156	45U	2000	2155	530	19"	670	370	165x150x2175	1	40,4	42,5
OF48UDD670-CC48U D=80 mm	Frame Double Frame Open System Rack D=670 mm	530x670x2289	48U	2133	2289	530	19"	670	370	165x150x2310	1	41,7	43,8

*CC= LG for Light Grey RAL 7035 & BL for Black RAL 9005 for customers to define while ordering.

