



Construction Drawings




Front view




Side view

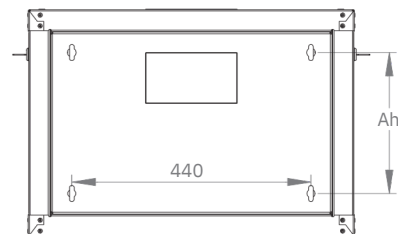


Rear view

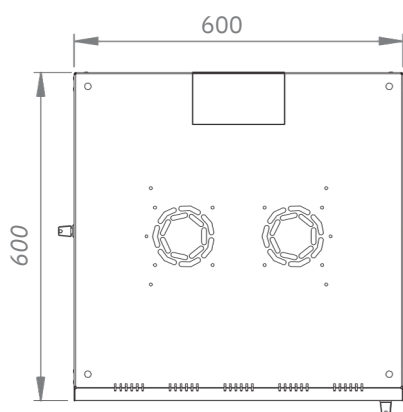

Top view

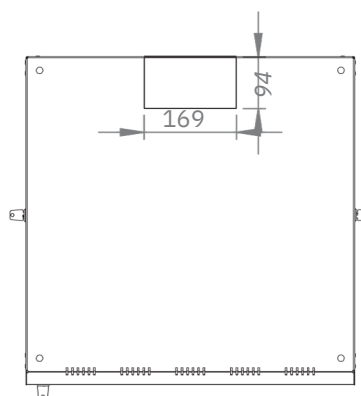



Bottom view

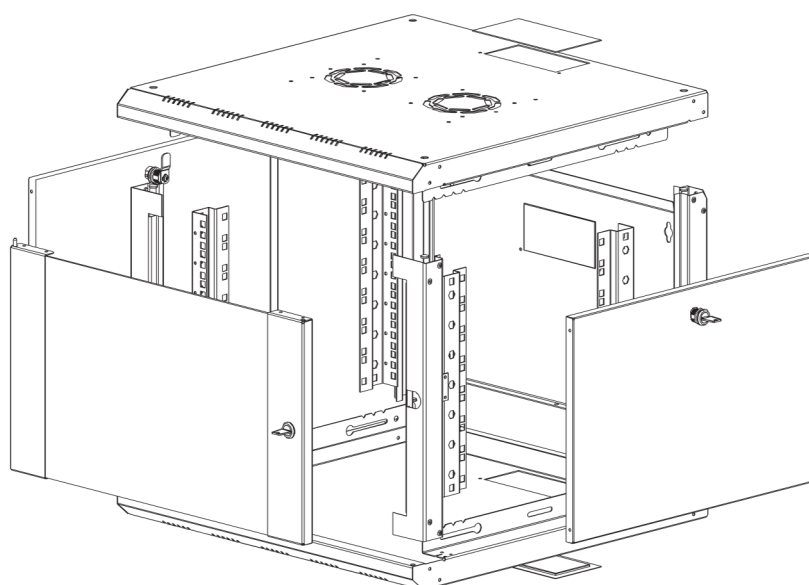


Exploded view

Width: 600 mm
Depth: 600 mm


Construction Drawings

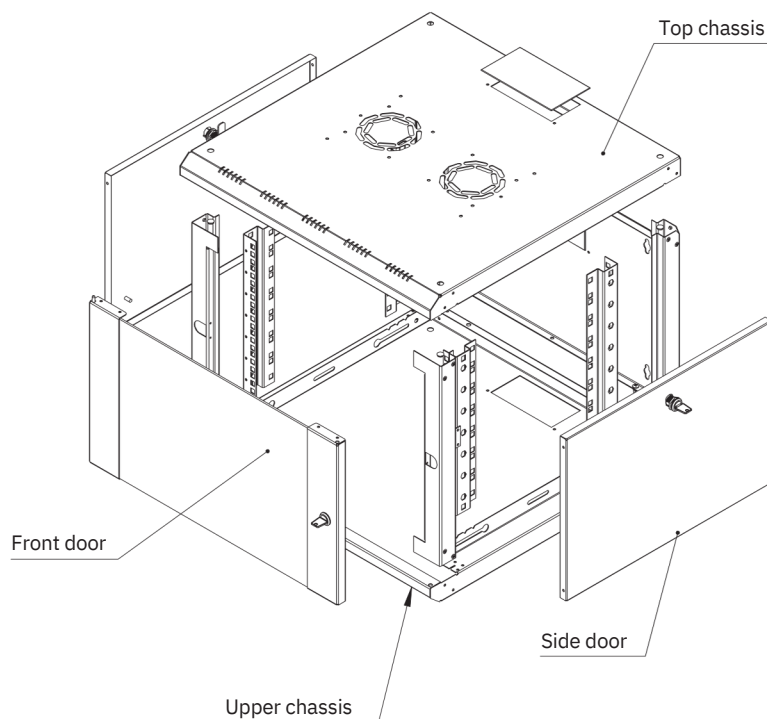

Dimensions in width and height

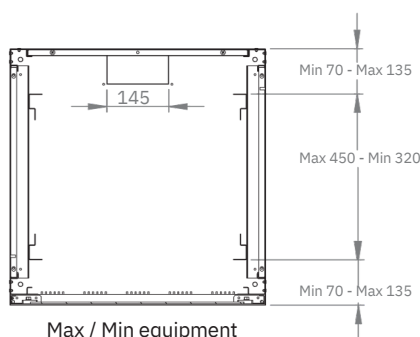

Max / Min equipment mounting distance

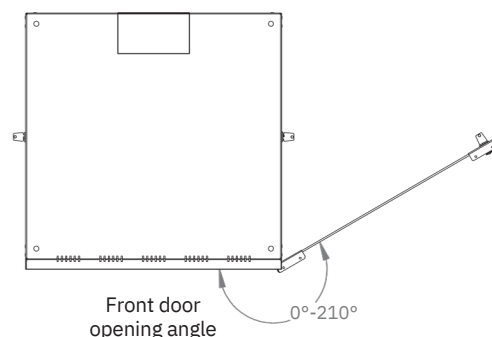

Front door opening angle

19" PROline Series Wall Mounting Cabinets W=600 mm D=600 mm

*Product Number	Product Description	Size WxDxH mm	h Size in U	h in mm	feet and/or castor h mm	**H mm, overall without	*** Ah Wall Mounting	Width Overall mm	Width Rail to Rail	Depth Overall mm	****Depth Shipping Conf. Rail to Rail mm	QTY IN PACKAGE	PACKING DIMENSIONS WxDxH mm	Product kgs Standard and NET Weight of Product kgs	Gross Weight of
LN-PR07U6060-CC	7U 19" Wall Mounting Cabinet W=600 mm D=600 mm	600x600x418	7U	311	418	260	600	19"	600	400	1	650x650x480	18	21	
LN-PR09U6060-CC	9U 19" Wall Mounting Cabinet W=600 mm D=600 mm	600x600x505	9U	400	505	349	600	19"	600	400	1	650x650x550	22	25	
LN-PR12U6060-CC	12U 19" Wall Mounting Cabinet W=600 mm D=600 mm	600x600x640	12U	533	640	482	600	19"	600	400	1	650x650x690	28	31	
LN-PR16U6060-CC	16U 19" Wall Mounting Cabinet W=600 mm D=600 mm	600x600x818	16U	711	818	660	600	19"	600	400	1	650x650x870	36	39,5	
LN-PR20U6060-CC	20U 19" Wall Mounting Cabinet W=600 mm D=600 mm	600x600x996	20U	889	996	838	600	19"	600	400	1	650x650x1050	43	46,5	

* CC= LG for Light Grey RAL 7035 & BL for Black RAL 9005 for customers to define while ordering.

** See overall height information without feet and or caster from drawings.

*** See Ah rear panel wall fixing height between holes for 7U, 9U, 12U, 16U, 20U on drawings and above chart, width is fixed 440 mm.

**** See min and max adjustable depth variations on drawings.